
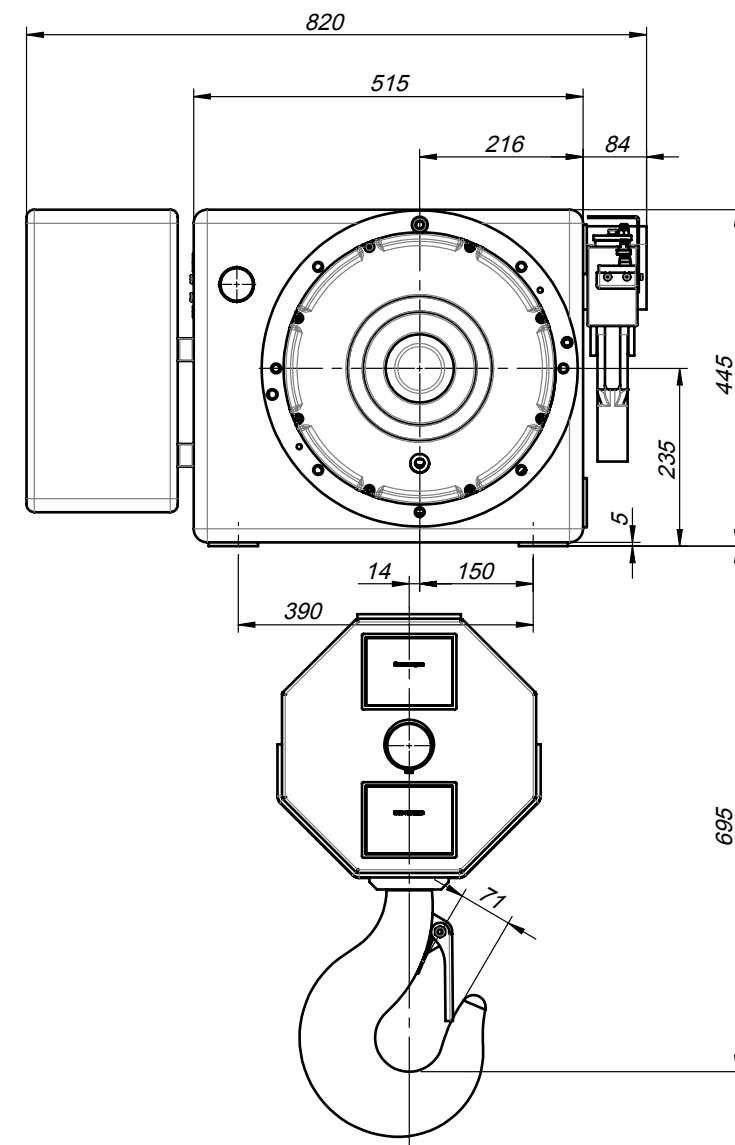


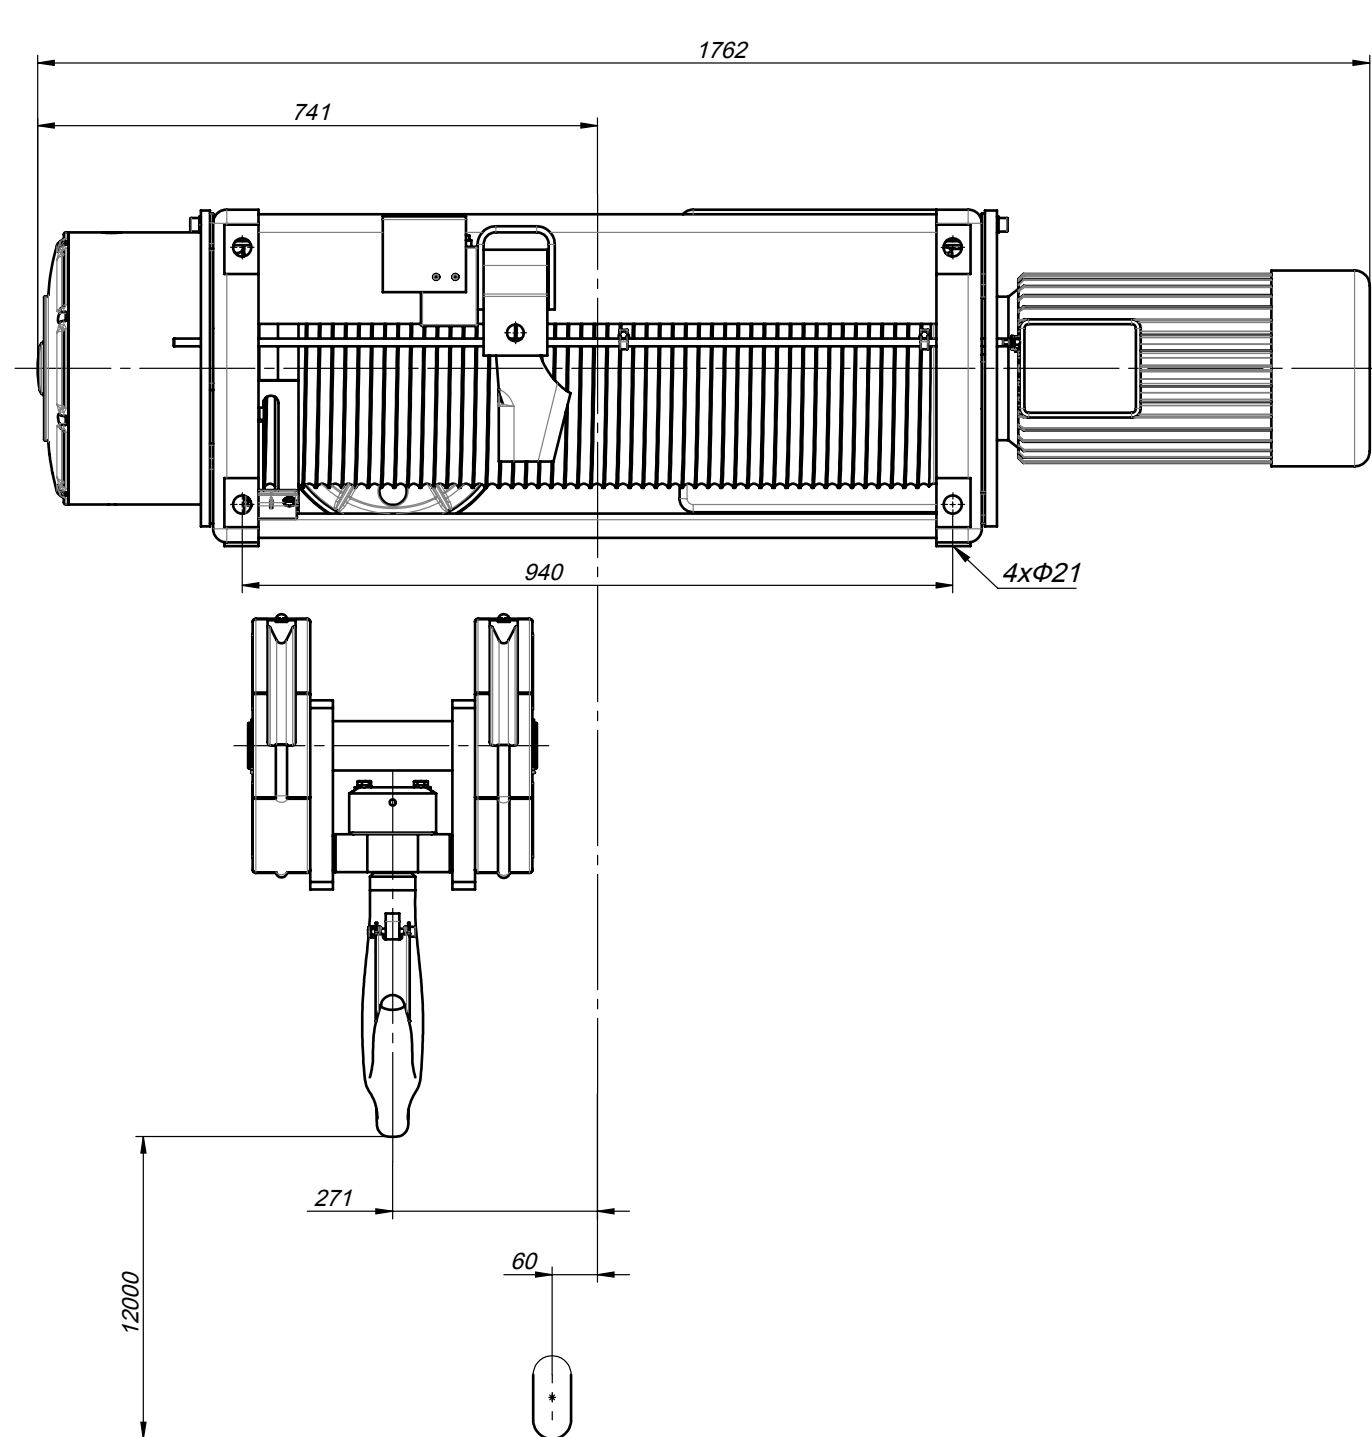

Hoisting Unit		
Electric hoist	type	MHL6-25 4/1 H12 V4C
Capacity	t	10,0
Mode of operation	FEM 9.511	2m
Lifting height	m	12
Lifting speed	m/min	4
Output	kW	8,0
Speed of revolution	min ⁻¹	930
Current	A	20,0
Power supply	---	3 ph / 400 V / 50 Hz
Control	---	pendant
Operation	---	indoor

						Озн. на графавост БДС-ISO 1302: Ra	Озн. на формата и разп. БДС-ISO 1101-1	Неозн. допуски БДС-ISO 2768
						БДС-ISO 128	Маса (kg)	Материал:
						490.07		
Изм.	Брой	Номер	Подпис	Дата		Лист	 balkancarpodem	
Разр.	Татарлиев			22.5.2020		1/1		
Пров.				22.5.2020				
Утв.	Кавалов			22.5.2020			Кат. №:	
Наименование:						Мащаб		
Stationary electric wire rope hoist - Reeving 4/1						1:10	Чертеж №: MHL6-25 4/1 H12 V4C	

D:\M\H\MH600\1MHL6-25 41 H_L_V_C